




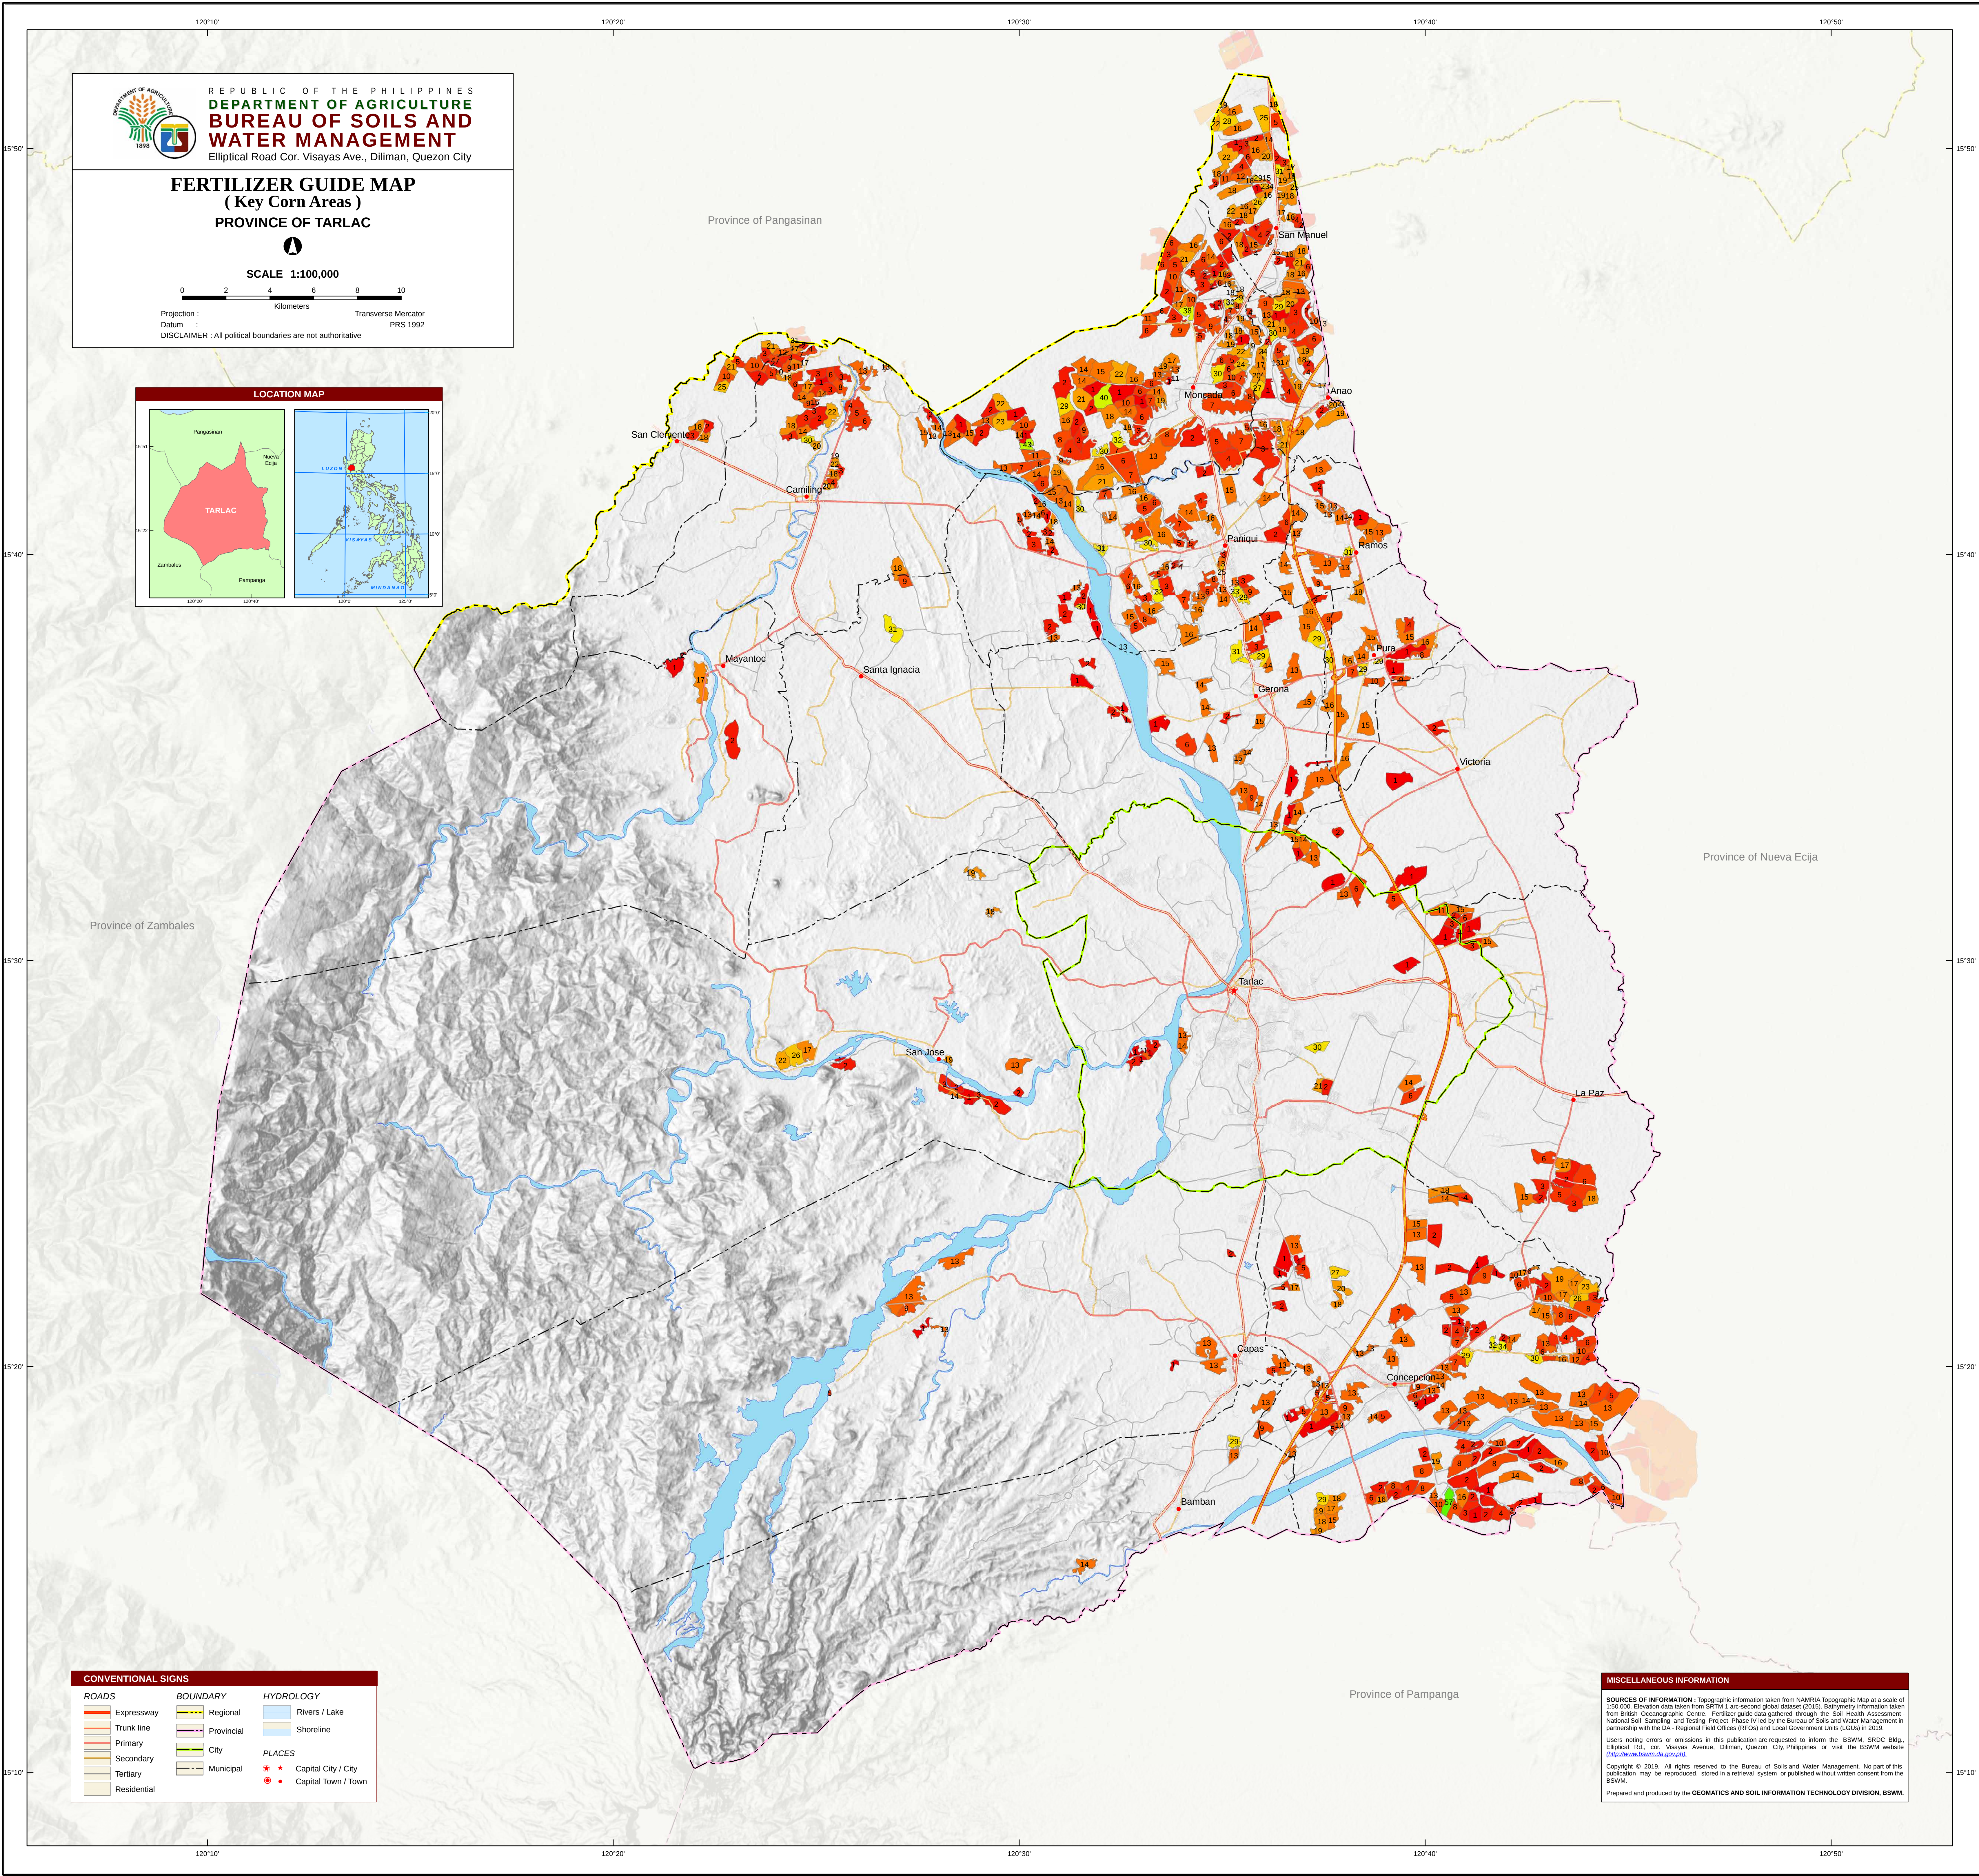




REPUBLIC OF THE PHILIPPINES
DEPARTMENT OF AGRICULTURE
BUREAU OF SOILS AND WATER MANAGEMENT
Elliptical Road Cor. Visayas Ave., Diliman, Quezon City

FERTILIZER GUIDE MAP
(Key Corn Areas)
PROVINCE OF TARLAC


SCALE 1:100,000
0 2 4 6 8 10
Kilometers

Projection : Transverse Mercator
Datum : PRS 1992
DISCLAIMER : All political boundaries are not authoritative



CONVENTIONAL SIGNS		
ROADS	BOUNDARY	HYDROLOGY
 Expressway	 Regional	 Rivers / Lake
 Trunk line	 Provincial	 Shoreline
 Primary	 City	
 Secondary	 Municipal	PLACES
 Tertiary		 Capital City / City
 Residential		 Capital Town / Town

MISCELLANEOUS INFORMATION

SOURCES OF INFORMATION : Topographic information taken from NAMRIA Topographic Map at a scale of 1:50,000. Elevation data taken from SRTM 1 arc-second global dataset (2015). Bathymetry information taken from British Oceanographic Centre. Fertilizer guide data gathered through the Soil Health Assessment - National Soil Sampling and Testing Project Phase IV led by the Bureau of Soils and Water Management in partnership with the DA - Regional Field Offices (RFOs) and Local Government Units (LGUs) in 2015.

Users noting errors or omissions in this publication are requested to inform the BSWM, SRDC Bldg., Elliptical Rd., cor. Visayas Avenue, Diliman, Quezon City, Philippines or visit the BSWM website (<http://www.bswm.da.gov.ph>).

Copyright © 2019. All rights reserved to the Bureau of Soils and Water Management. No part of this publication may be reproduced, stored in a retrieval system or published without written consent from the BSWM.

Prepared and produced by the GEOMATICS AND SOIL INFORMATION TECHNOLOGY DIVISION, BSWM.

Mapping Symbol	Description	All fertilizer recommendation options are recommended to apply additional 10-20 bags Organic Fertilizer per hectare																Area				
		HYBRID CORN																				
		WET SEASON								DRY SEASON												
		Nutrient Requirement	Recommended Fertilizer Rate (bags/hectare)				Nutrient Requirement	Recommended Fertilizer Rate (bags/hectare)				Nutrient Requirement	Recommended Fertilizer Rate (bags/hectare)				Nutrient Requirement	Recommended Fertilizer Rate (bags/hectare)				ha
N-P-K	N	P ₂ O ₅	K ₂ O		N	P ₂ O ₅	K ₂ O		N	P ₂ O ₅	K ₂ O		N	P ₂ O ₅	K ₂ O		N	P ₂ O ₅	K ₂ O			
1	L-L4	120	60	60	"Complete" Option: (1st Application): 8.5 (14-14-14); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 2.25 (46-0-0); 1.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 6.75 (0-18-0); 2 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 2.25 (0-18-0); 0.75 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.5 (46-0-0); 1.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0);				1,948	7.73
2	L-L4M	120	60	45	"Complete" Option: (1st Application): 8.5 (14-14-14); 0.75 (46-0-0); 1.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3.25 (46-0-0); 1.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.5 (46-0-0); 1.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0);				2,530	10.03
3	L-L4MH	120	60	30	"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-60-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 2.25 (46-0-0); 3.5 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-60-0);				1,376	5.46
4	L-L4H	120	60	45	"Complete" Option: (1st Application): 8.5 (14-14-14); 2.5 (46-0-0); 6 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 5 (46-0-0); 6 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 6.75 (0-18-0); 0.25 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.25 (0-60-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.5 (46-0-0); 0.25 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 6.75 (0-18-0); 0.25 (0-60-0);				998	3.96
5	L-M-L1	120	40	60	"Complete" Option: (1st Application): 8.5 (14-14-14); 1 (46-0-0); 0.75 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3 (46-0-0); 0.75 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 2 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.75 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 0.75 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 2 (0-60-0);				897	3.56
6	L-M-L1	120	40	45	"Complete" Option: (1st Application): 8.5 (14-14-14); 1 (46-0-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3 (46-0-0); 0.25 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.25 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 0.25 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0);				1,577	6.25
7	L-M-L1MH	120	40	30	"Complete" Option: (1st Application): 4.25 (14-14-14); 1.25 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 4 (46-0-0); 1 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 1 (0-60-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 4.25 (14-14-14); 2.25 (46-0-0); 1 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 1 (0-60-0);				934	3.70
8	L-M-L1H	120	40	7	"Complete" Option: (1st Application): 8.5 (14-14-14); 2.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3.75 (46-0-0); 3.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 0.25 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 0.25 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 0.25 (0-60-0);				855	3.39
9	L-M-L1H	120	60	60	"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3.75 (46-0-0); 1 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 2 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1 (46-0-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 2 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 2 (0-60-0);				557	2.21
10	L-M-L1MH	120	20	45	"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3.75 (46-0-0); 1 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1.5 (46-0-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 1 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 4.5 (0-18-0); 1.5 (0-60-0);				569	2.26
11	L-M-L1MH	120	20	30	"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 0.5 (0-60-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 2.25 (0-18-0); 1 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 4.5 (46-0-0); 0.5 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 4.5 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 2.25 (0-18-0); 1 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1 (46-0-0); 0.5 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1 (46-0-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 2.25 (0-18-0); 1 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 0.5 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 1 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 2.25 (0-18-0); 1 (0-60-0);				277	1.10
12	L-M-L1H	120	20	7	"Complete" Option: (1st Application): 8.5 (14-14-14); 2.5 (46-0-0); 1.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 2.25 (0-18-0); 0.25 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 5 (46-0-0); 1.5 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 4.5 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 2.25 (0-18-0); 0.25 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 2.25 (0-18-0); 0.25 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 2.25 (46-0-0); 1.5 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 2 (46-0-0); 0.25 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 2.25 (0-18-0); 0.25 (0-60-0);				83	0.33
13	L-L4L	120	0	60	"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 1.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 2 (0-60-0); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 3.25 (46-0-0); 1.75 (0-18-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 5.25 (46-0-0); 6.75 (0-18-0); 2 (0-60-0);				"Complete" Option: (1st Application): 5.75 (14-14-14); 1.5 (46-0-0); 1.75 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 1.5 (46-0-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0); Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 2 (0-60-0); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1st Application): 8.5 (14-14-14); 1.75 (46-0-0); 2 (0-60-0); "AmmonPhos" Option: (1st Application): 6 (16-20-0); 3.25 (46-0-0); 2 (0-60-0); Single Element Option: (1st Application): 3.5 (46-0-0); 6.75 (0-18-0); 2 (0-60-0);				3,454	13.67
14																						

